

**LISTING OF CLAIMS**

This listing of claims will replace all prior versions, and listings, of claims in the application:

Claim 1 (Previously presented). A curable adhesive composition for anchoring materials in or to concrete or masonry comprising:

- a. a polymerizable vinyl ester compound;
- b. an ethylenically unsaturated monomer reactive with said polymerizable vinyl ester;
- c. from about 5 wt % to about 10 wt % of reactive multifunctional acrylate;
- d. curing catalyst; and
- e. activator;

said adhesive composition having a pull out performance after one hour at a temperature of 23°C of at least about 70 KN.

Claim 2 (Previously presented). The adhesive composition of claim 1 wherein said polymerizable vinyl ester is present in the composition in amounts of from about 10 wt % to about 30 wt % of the composition.

Claim 3 (Previously presented). The adhesive composition of claim 1 wherein said polymerizable vinyl ester is present in the composition in amounts of from about 10 wt % to about 25 wt % of the composition.

Claim 4 (Currently amended). The adhesive composition of claim 1 wherein said reactive multifunctional acrylate comprises ~~a major proportion of~~ acrylate that is at least tri-functional.


Claim 5 (Previously presented). The adhesive composition of claim 4 wherein said

reactive multifunctional acrylate consists essentially of acrylate that is at least tri-functional.

Claim 6 (Currently amended). The adhesive composition of claim 45 wherein said reactive multifunctional acrylate comprises acrylate that is at least tetra-functional.

Claim 7 (Previously presented). The adhesive composition of claim 6 wherein said reactive multifunctional acrylate consists essentially of acrylate that is at least tetra-functional.

Claim 8 (Currently amended). The adhesive composition of claim 1 wherein said polymerizable vinyl ester comprises the reaction product of an epoxy compound and a compound containing an ethylenically unsaturated group, said epoxy compound corresponding to formula (I),



wherein

Ar is substituted or unsubstituted aryl.

R is substituted or unsubstituted divalent radical derived from alkyl, oxyalkyl, arylalkyl, or oxyalkylaryl, ~~alkyl or arylalkyl,~~

R<sup>1</sup> is independently H or R,

~~for each R<sub>x</sub>, x is independently 0 or 1,~~

~~for each O<sub>y</sub>, y is independently 0 or 1,~~

~~for each (O-R<sup>1</sup>)<sub>z</sub>, z is independently 0 to 4,~~

x, y and z are each independently 0 to 5 provided that x and y can not both be zero, and

n is from 1 to 5.

Claim 9 (Previously presented). The adhesive composition of claim 1 wherein said ethylenically unsaturated monomer comprises vinyl toluene.

Claim 10 (Currently amended). The adhesive composition of claim 19 wherein said the weight ratio of vinyl ester to said ethylenically unsaturated monomer is from about 0.8 to about 3.

Claim 11 (Previously presented). The adhesive composition of claim 10 wherein said ethylenically unsaturated monomer comprises vinyl toluene.

Claim 12 (Previously presented). The adhesive composition of claim 11 wherein said ethylenically unsaturated monomer consists essentially of vinyl toluene.

Claim 13 (Cancelled).

Claim 14 (Previously presented). The adhesive composition of claim 1 having a pull out performance after about 24 hours at a temperature of 23°C of at least about 80 KN.

Claim 15 (Previously presented). The adhesive composition of claim 1 having a pull out performance after about 24 hours at a temperature of 80°C of at least about 50 KN.

Claim 16 (Withdrawn). A curable adhesive composition for anchoring materials in or to concrete or masonry comprising: a curable resin; from about 5 pbwa to about 30 pbwa of reactive multifunctional acrylate; curing catalyst; and activator, said composition exhibiting a pull out performance after about 24 hours at a temperature of 80.degree. C. of at least about 50 KN.

Claim 17 (Withdrawn). The adhesive composition of claim 16 wherein said curable resin is selected from the group consisting of acrylic resins, vinyl ester resins, urethane resins, polyester resins and combinations of two or more of these.

Claim 18 (Withdrawn). The adhesive composition of claim 16 wherein said curable resin comprises polymerizable vinyl ester in amount of from about 10 wt % to about 25 wt % of the composition.

Claim 19 (Withdrawn). The adhesive composition of claim 18 wherein said reactive multifunctional acrylate comprises a major proportion of acrylate that is at least tri-functional.

Claim 20 (Withdrawn). The adhesive composition of claim 19 wherein said reactive multifunctional acrylate consists essentially of acrylate that is at least tri-functional.

Claim 21 (Withdrawn). The adhesive composition of claim 20 wherein said reactive multifunctional acrylate comprises acrylate that is at least tetra-functional.

Claim 22 (Withdrawn). The adhesive composition of claim 21 wherein said reactive multifunctional acrylate consists essentially of acrylate that is at least tetra-functional.

Claim 23 (Previously presented). A curable adhesive composition for anchoring materials in or to concrete or masonry comprising:

- a. a polymerizable vinyl ester compound;
- b. an ethylenically unsaturated monomer reactive with said polymerizable vinyl ester;
- c. from about 5 wt % to about 10 wt % of reactive multifunctional acrylate wherein said acrylate comprises a major proportion of acrylate that is at least tri-functional;
- d. curing catalyst; and
- e. activator.

Claim 24 (Previously presented). The adhesive composition of claim 23 wherein said polymerizable vinyl ester is present in the composition in amounts of from about 10 wt % to about 30 wt % of the composition.


Claim 25 (Previously presented). The adhesive composition of claim 23 wherein said polymerizable vinyl ester is present in the composition in amounts of from about 10 wt % to about 25 wt % of the composition.

Claim 26 (Previously presented). The adhesive composition of claim 23 wherein said reactive multifunctional acrylate consists essentially of acrylate that is at least tri-functional.

Claim 27 (Currently amended). The adhesive composition of claim ~~23~~<sup>26</sup> wherein said reactive multifunctional acrylate comprises acrylate that is at least tetra-functional.

Claim 28 (Previously presented). The adhesive composition of claim 27 wherein said reactive multifunctional acrylate consists essentially of acrylate that is at least tetra-functional.

Claim 29 (Currently amended). The adhesive composition of claim 23 wherein said polymerizable vinyl ester comprises the reaction product of an epoxy compound and a compound containing an ethylenically unsaturated group, said epoxy compound corresponding to formula (I),

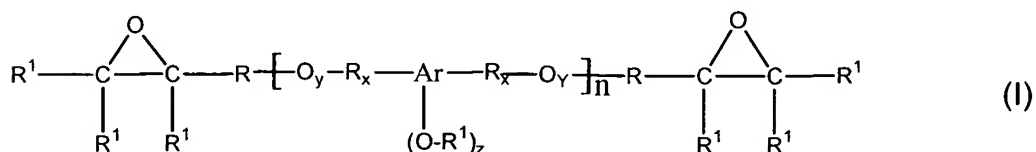

wherein

Ar is substituted or unsubstituted aryl.

R is substituted or unsubstituted divalent radical derived from alkyl, oxyalkyl, arylalkyl, or oxyalkylaryl,

R<sup>1</sup> is independently H or R,

for each R<sub>x</sub>, x is independently 0 or 1,

for each O<sub>y</sub>, y is independently 0 or 1,

for each (O-R<sup>2</sup>)<sub>z</sub>, z is independently 0 to 4,

~~x, y and z are each independently 0 to 5~~ provided that x and y can not both be zero, and n is from 1 to 5.

Claim 30 (Previously presented). The adhesive composition of claim 23 wherein said ethylenically unsaturated monomer comprises vinyl toluene.

Claim 31 (Previously presented). The adhesive composition of claim 23 wherein said the weight ratio of vinyl ester to said ethylenically unsaturated monomer is from about 0.8 to about 3.

Claim 32 (Currently amended). The adhesive composition of claim ~~23~~31 wherein said ethylenically unsaturated monomer comprises vinyl toluene.

Claim 33 (Currently amended). The adhesive composition of claim ~~30~~32 wherein said ethylenically unsaturated monomer consists essentially of vinyl toluene.

Claim 34 (Previously presented). The adhesive composition of claim 23 having a pull out performance after one hour at a temperature of 23°C of at least about 70 KN.

Claim 35 (Previously presented). The adhesive composition of claim 23 having a pull out performance after about 24 hours at a temperature of 23°C of at least about 80 KN.

Claim 36 (Currently amended). The adhesive composition of claim ~~42~~23 having a pull out performance after about 24 hours at a temperature of 80°C of at least about 50 KN.

Claim 37 (Previously presented). A curable adhesive composition for anchoring materials in or to concrete or masonry comprising:

- a. a polymerizable vinyl ester compound;
- b. an ethylenically unsaturated monomer reactive with said polymerizable vinyl ester wherein said monomer comprises monomer that is aromatic;
- c. from about 5 wt % to about 10 wt % of reactive multifunctional acrylate;
- d. curing catalyst; and
- e. activator.

Claim 38 (Currently amended). The adhesive composition of claim ~~35~~37 wherein said polymerizable vinyl ester is present in the composition in amounts of from about 10 wt % to about 30 wt % of the composition.

Claim 39 (Currently amended). The adhesive composition of claim ~~35~~37 wherein said polymerizable vinyl ester is present in the composition in amounts of from about 10 wt % to about 25 wt % of the composition.

Claim 40 (Currently amended). The adhesive composition of claim ~~35~~37 wherein said reactive multifunctional acrylate comprises ~~a major proportion of~~ acrylate that is at least tri-functional.


Claim 41 (Currently amended). The adhesive composition of claim ~~38~~40 wherein said reactive multifunctional acrylate consists essentially of acrylate that is at least tri-functional.

Claim 42 (Currently amended). The adhesive composition of claim ~~39~~40 wherein said reactive multifunctional acrylate comprises acrylate that is at least tetra-functional.

Claim 43 (Currently amended). The adhesive composition of claim ~~40~~42 wherein said

reactive multifunctional acrylate consists essentially of acrylate that is at least tetra-functional.

Claim 44 (Currently amended). The adhesive composition of claim 374 wherein said polymerizable vinyl ester comprises the reaction product of an epoxy compound and a compound containing an ethylenically unsaturated group, said epoxy compound corresponding to formula (I),

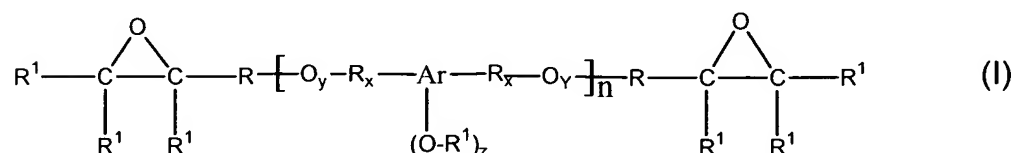

wherein

Ar is substituted or unsubstituted aryl.

R is substituted or unsubstituted divalent radical derived from alkyl, oxyalkyl, arylalkyl, or oxyarylkyl,

R<sup>1</sup> is independently H or R,

for each R<sub>x</sub>, x is independently 0 or 1,

for each O<sub>y</sub>, y is independently 0 or 1,

for each (O-R<sup>1</sup>)<sub>z</sub>, z is independently 0 to 4,

x, y and z are each independently 0 to 5 provided that x and y can not both be zero, and

n is from 1 to 5.

Claim 45 (Currently amended). The adhesive composition of claim 3537 wherein said ethylenically unsaturated monomer comprises vinyl toluene.

Claim 46 (Currently amended). The adhesive composition of claim 3537 wherein said the weight ratio of vinyl ester to said ethylenically unsaturated monomer is from about 0.8 to about 3.



Claim 47 (Currently amended). The adhesive composition of claim ~~[[44]]~~37 wherein said ethylenically unsaturated monomer comprises vinyl toluene.

Claim 48 (Currently amended). The adhesive composition of claim ~~45~~47 wherein said ethylenically unsaturated monomer consists essentially of vinyl toluene.

Claim 49 (Currently amended). The adhesive composition of claim ~~35~~37 having a pull out performance after one hour at a temperature of 23°C of at least about 70 KN.

Claim 50 (Currently amended). The adhesive composition of claim ~~36~~37 having a pull out performance after about 24 hours at a temperature of 23°C of at least about 80 KN.

Claim 51 (Currently amended). The adhesive composition of claim ~~35~~37 having a pull out performance after about 24 hours at a temperature of 80°C of at least about 50 KN.